

3 exciting models
to choose from!



No. 53028
Deluxe 8 hp Tractor with
Electric Starter.

No. 53035
Deluxe 10 hp Tractor with
Electric Starter and Hydraulic
Lift Accessory.

Jacobsen **CHIEF** Tractors




No. 53031
Standard 6 hp Tractor with
Recoil Starter.

**ALL PURPOSE...
ALL SEASON...
ALL POWERFUL!**

JACOBSEN CHIEF TRACTORS



VHGMC

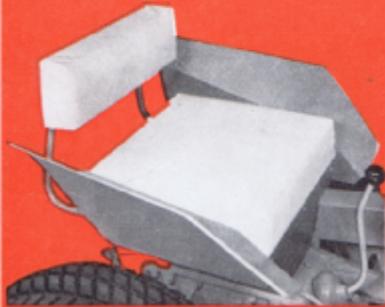


SEAT & BACK REST

Air cushion seat and back rest are designed to give you an exceptionally comfortable ride.


CONTROL PANEL

Easy to read automotive type control panel gives the operator finger-tip control in all phases of tractor operation. Ignition is controlled by a key-type lock for convenience and safety. Handy choke throttle assures instant starting. Engine speed is easily controlled by finger-tip pressure on throttle lever. Clear reading ammeter and instant starting with a turn of the key on models equipped with electric starter.

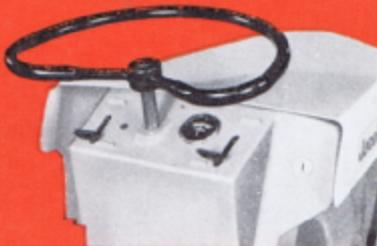

TOOL BOX


No burden to carry tools with you. Tool box is conveniently located under the exclusive air-ride seat.

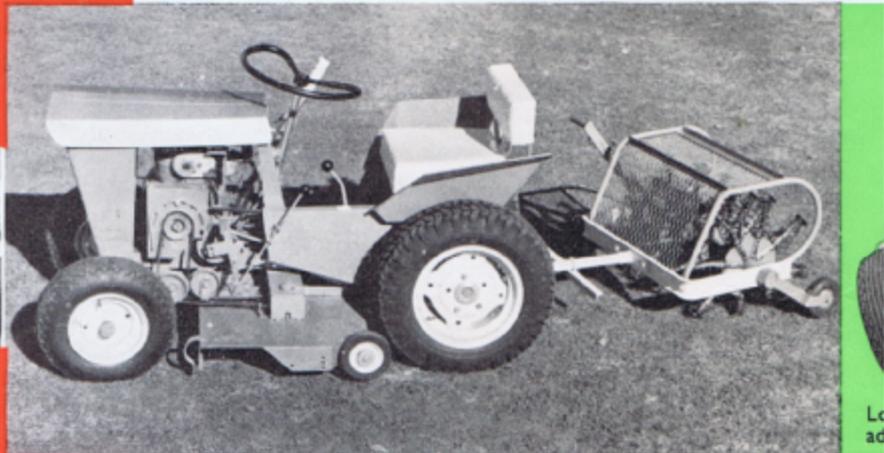

(Underside View)

Twin steel, heat-treated ground blades resist shock, retain edge for maximum cutting efficiency. Cutting arcs overlap leaving no streaks. Extra heavy-duty Timken bearings assure longer maintenance-free life. Heavy duty welded steel deck construction adds strength and durability to Jacobsen's exclusive 36 inch rotary.

SPECIFICATIONS

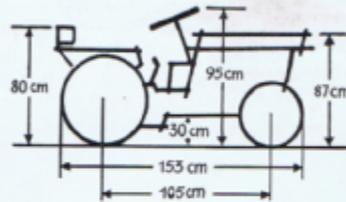

No. 53031, 53028, 53035

Length overall: 61".
 Wheelbase: 42".
 Width overall: 33".
 Height—Steering wheel: 38".
 Hood: 34½".
 Backrest: 32".
 Ground Clearance —
 Front Axle: 8½".
 Transmission: 7".
 Frame: 11½".
 Turning Radius: 4' 3".
 Tractor: 32", 38", 11½", 34½".
 Speed:

	Engine Speed	
	2200 RPM	3200 RPM
1st Gear	1.29 MPH	1.88 MPH
2nd Gear	2.04 MPH	3.04 MPH
3rd Gear	4.61 MPH	6.70 MPH
Reverse	1.62 MPH	2.35 MPH

CART No. 59535 (H.D.) No. 59530 (L.D.)

The all steel heavy duty 36" x 48" x 12" dump cart features a full upswing tail gate and 4:00 x 8 pneumatic tyres; work load capacity is 700 pounds. You can transport seed, fertilizer, or Chief attachments and accessories easily. Also available is the light duty 24" x 36" cart with semi-pneumatic tyres.



Engine:
 No. 53031 Lauson HT6
 No. 53028 Kohler K181
 No. 53035 Kohler K241S
 Horsepower @ 3600 RPM
 No. 53031 — 6.0
 No. 53028 — 8.0
 No. 53035 — 10.0
 Engine Type 4 cycle, single cylinder air cooled.
 Oil Capacity
 No. 53031 — 1½ pints.
 No. 53028 — 2½ pints
 No. 53035 — 5 pints.
 Fuel Capacity 1½ galls.
 Fuel Filter: Sediment Bowl & Fuel Filter.
 Fuel Pump: Auto—Diaphragm Type.
 Fuel Pump: Auto — Diaphragm Type for 10 hp only.
 Air Cleaner: Dry Type.
 Starter:
 No. 53031: Recoil.
 No. 53028 & 53035: 12 Volt Electric Starter Generator Includes Battery, Ammeter, Solenoid Regulator and Wiring.
 CLUTCH
 V-Belt Idler Clutch — Coupled with brake.



Vintage Horticultural & Garden Machinery Club

VHGMC

JACOBSEN **CHIEF** TRACTORS

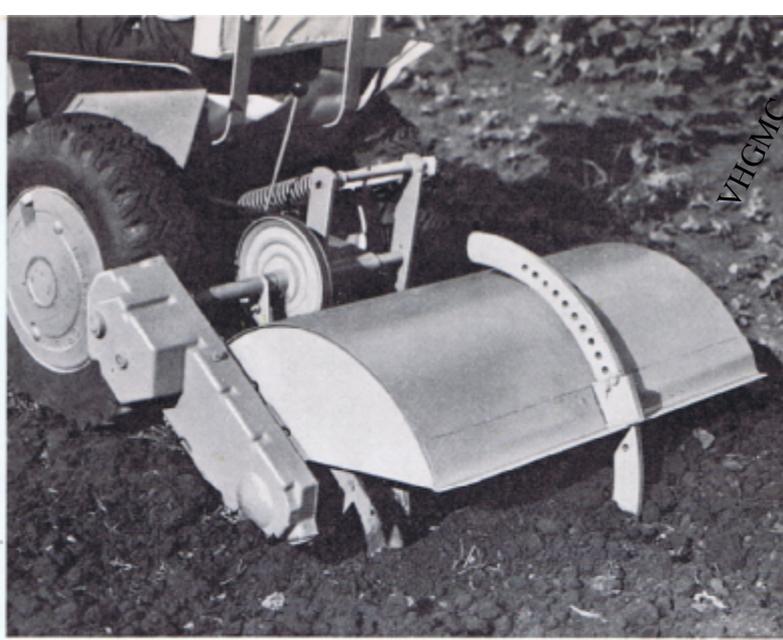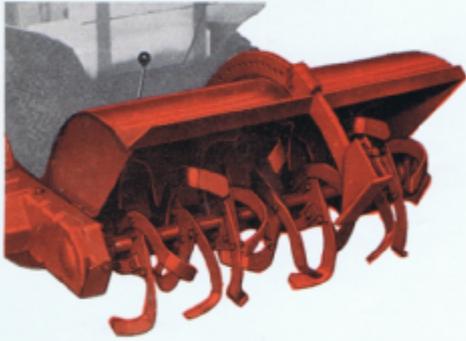


VHGMCO

The rugged Jacobsen 32 inch commercial tiller is designed for heavy duty garden work. The strong chain transmission, needle and ball bearings, and extra strong tines and tine shaft are only three of the many quality features built into this tractor attachment. The tiller drive is


controlled by an independent clutch and convenient lift lever located near the driver's seat. Easy lifting is gained by a spring compensated lift lever. The tiller anchor prevents tractor surge — thus assuring steady tilling performance. (Requires Jacobsen Speed Reducer.)

Y PIVOT STEERING

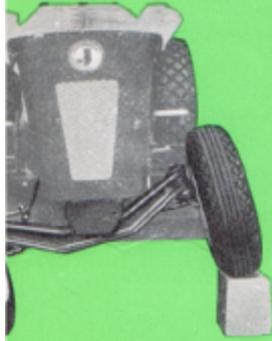


centre of gravity provides safety on hills and slopes.

PARKING BRAKE

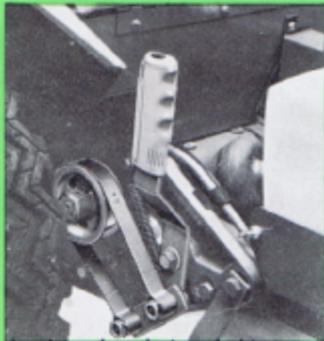


Jacobsen has designed this accessory for greater safety when working in hilly terrain.

HYDRAULIC LIFT

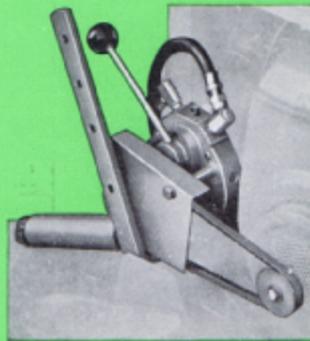


Power driven by the big Chief engine, the Jacobsen Hydraulic Lift raises and lowers many attachments quickly but smoothly — virtually eliminating jarring or bumping.

DRIVE POWER

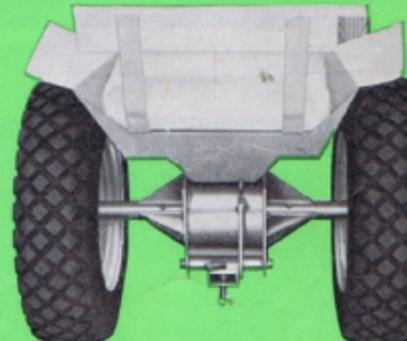

Automotive-type 3 speed geared transmission and differential assemblies are contained in one oil-tight unit in the rear.

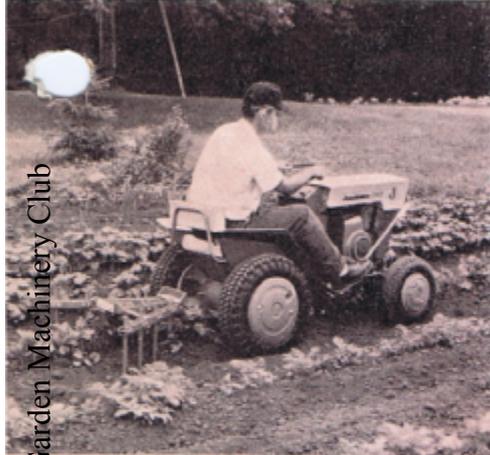

CULTIVATOR

Easy to cultivate row crops with this sturdy 8-shovel cultivator attached to your Chief. You can either cultivate between rows or straddle the low-growing crops.

DISC HARROW

The sturdy disc-harrow attachment has built-in weight pan for deeper discing chores.

10-INCH PLOUGH

Jacobsen's 10-inch plough attachment is fully adjustable for all soil conditions. Ploughing land for lawns or gardens is no task at all for the Jacobsen Chief with 10-inch plough. Special length beam assures proper bottoming in heavy soil. **NOTE: Lift Hitch Kit is required for garden attachments.**




Vintage Horticultural & Garden Machinery Club

VHGMCO

RIDE-N-SPRAY

For a more beautiful, bountiful lawn and garden, utilize the Ride-N-Spray, power sprayer, which is readily attached to the rear of the Chief tractor. The Ride-N-Spray has a 12½ gallon capacity — sprays up to 30 foot heights — easily operated from tractor driver's position. Also available, at slight additional cost, a spray boom for easy ground spraying.

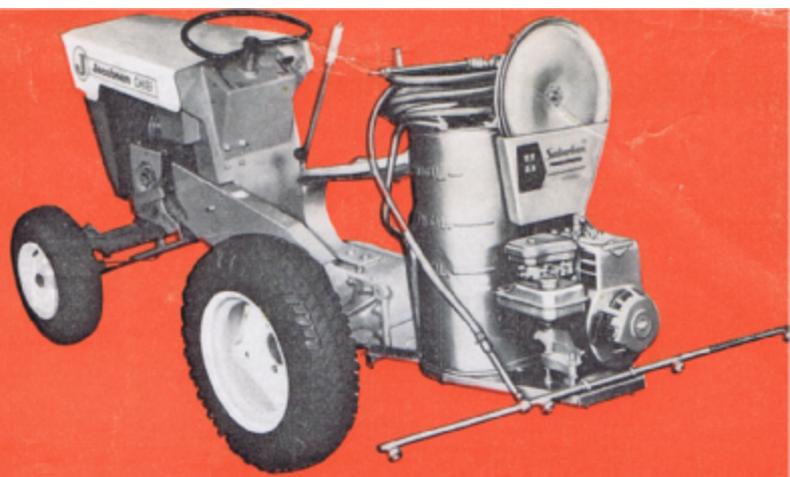

LAWN ROLLER

No problem leveling your new or old lawn or finishing off seed beds with a Chief and lawn roller. The 32" wide — 24" diameter, heavy gauge steel roller, 550 lbs. (when filled with water) moves along easily when pulled by the Jacobsen Chief. **No. 59540.**




ALL-PURPOSE LOADER

The newest tool made available for the Jacobsen Chief lawn and garden tractor is the Danco loader. The all-purpose small loader can be used at home or commercially. Ideal to ease heavy work load, move dirt, sand, trash, build seed beds, load shrubs. Excellent for small industrial plants poultry farms, nurseries, small plants. Fork lift, snow bucket and crane boom are optional equipment. For a 300 lb. payload, tractor must be equipped with a rear counter weight of 150 lbs.



SNOW-AUGER No. 59643

The Jacobsen Chief with 36" wide, all-steel, high capacity, high velocity snow-auger, whirls snow away by the yard! The easy to install power-driven 36" wide auger features a single belt drive and simplified spring loaded clutch. Spout can turn a full 270°; is directed by a simple crank from the driver's seat. Lift control lever on Chief raises or lowers the auger.

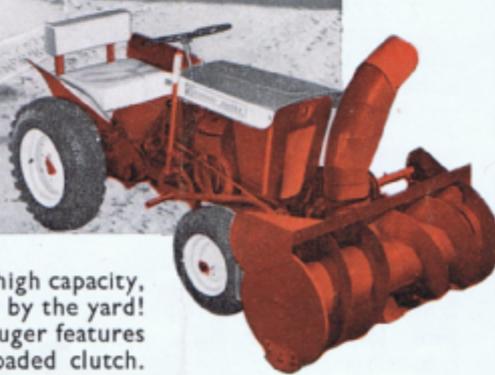

Vintage Horticultural & Garden Machinery Club



HORWOOL MACHINERY AGENTS

Head Office and Works :
**UPPER BEDFORDS
 LOWER BEDFORDS ROAD
 ROMFORD, ESSEX.**

Telephone: Ingrebourne 42380/40716

Midland Sales and Service :
**1328 WARWICK ROAD
 ACOCKS GREEN
 BIRMINGHAM 27**

Telephone: Acocks Green 0890/0808

